


Extrusion Welders aero, mini2 and hydro



Extrusion Welders aero, mini2 and hydro

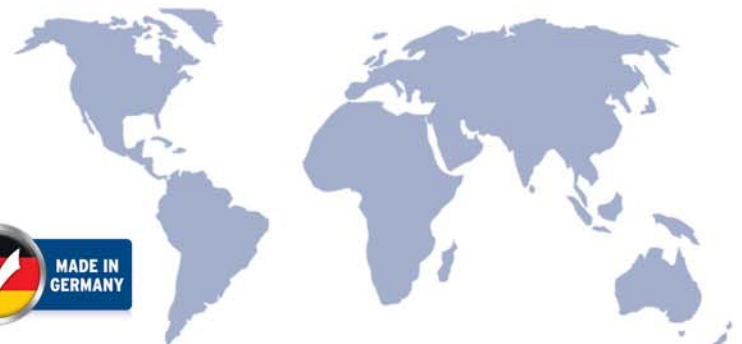

Technical Data	EXWELD hydro beta2 Item no. 21999	EXWELD hydro beta2 Item no. 21863 (US-Version)
Power supply:	230/400 V 3/N/PE 50/60 Hz	230 V 3/PE 50/60 Hz
Power consumption:		
Power consumption (preheater):	2.5 kVA	2.5 kVA
Power consumption (extrusion chamber):	0.4 kVA	0.4 kVA
Power consumption (oil heater):	0.5 kVA	0.5 kVA
Hydraulic unit:	3.0 kVA	3.0 kVA
Blower:	1.0 kVA	1.0 kVA
Controls:	0.1 kVA	0.1 kVA
Air requirement:	>300 l/min	>300 l/min
Welding capacity (PE):	4.8 kg/h	4.8 kg/h
Welding capacity (PP):	4.3 kg/h	4.3 kg/h
Welding rod diameter:		
PE (mm):	3,4,5	3,4,5
PP (mm):	3,4,5	3,4,5
Weight:		
Extrusion head:	7 kg	7 kg
Supply unit:	63 kg	63 kg
Dimensions (L x H x W in mm):	700 x 600 x 1.000	700 x 600 x 1.000



Technical Data	EXWELD mini2 Item no. 30270	EXWELD aero Item no. 30268	EXWELD aero C Item no. 30269
Power supply:	230 V 1/N/PE 50/60 Hz	230 V 1/N/PE 50/60 Hz	230 V 1/N/PE 50/60 Hz
Power consumption:	2,200 W	3,000 W	3,000 W
Air requirement:	self-contained air supply	self-contained air supply	self-contained air supply
Heating capacity:	840 W + 1,000 W (preheater)	2,200 W	2,200 W
Welding capacity (PE):	approx. 0.9 kg/h	approx. 2.6 kg/h	approx. 2.6 kg/h
Welding capacity (PP):	approx. 0.9 kg/h	approx. 2.2 kg/h	approx. 2.2 kg/h
Welding capacity (PVC):	approx. 1.2 kg/h	-	-
Welding rod diameter:			
PE (mm):	3,4	3,4	3,4
PP (mm):	3,4	3,4	3,4
PVC (mm):	3,4	-	-
Weight: *	5.2 kg	5.8 kg	5.0 kg
Dimensions (L x H x W in mm):	440 x 335 x 100	535 x 355 x 110	535 x 355 x 110

* without input lead (cable)



WEGENER International GmbH

Ernst-Abbe-Str. 30

D-52249 Eschweiler

+49 2403 70484-0

+49 2403 70484-99

info@wegenerwelding.de

www.wegenerwelding.de